
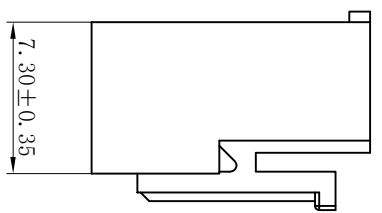
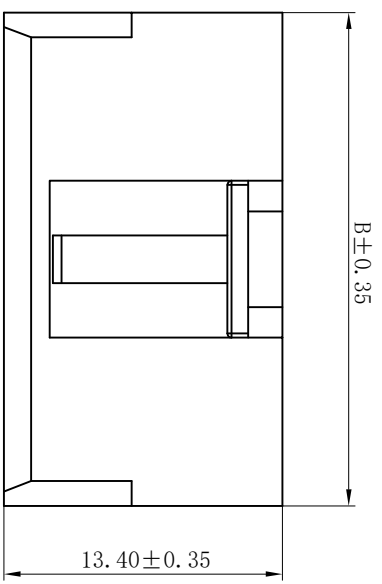


版次	日期	内容

Electrical properties

- Current rating: 7A AC\DC
- Voltage rating: 250V AC\DC
- Temperature range: -25°C to 85°C
- Contact resistance: Initial value/20mΩ max
- Insulation resistance: 1000MΩ min
- Withstanding voltage: 1500V AC/ minute
- Material : Nylon UL94V-0(2)

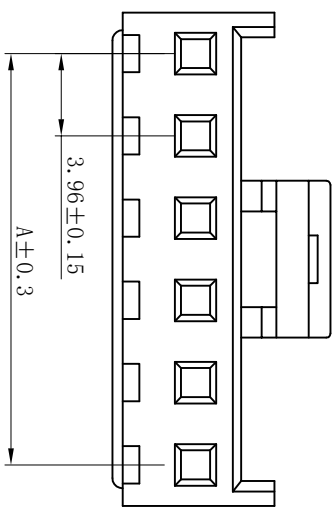

孔位 poles	A	B
2	3.96	7.92
3	7.92	11.88
4	11.88	15.84
5	15.84	19.80
6	19.80	23.76
7	23.76	27.72
8	27.72	31.68
9	31.68	35.64
10	35.64	39.60
11	39.60	43.56
12	43.56	47.52
13	47.52	51.48
14	51.48	55.44
15	55.44	59.40

浙江乐马电气有限公司 设计 张书晨

尺寸公差	角度公差	品名:	审核	王佳
.X ±0.25	X.° ±3.0°	VH-nY	批准	陈其林
.XX ±0.15	.X° ±2.0°	图号:	批	
.XXX ±0.05	.XX° ±1.0°	39601-Y	版本:	A
	单位:	比例:	页数:	1/1
	mm	--		